




## Track Adapter Feature

- > Current ripple:  $\pm 3\%$
- > Adjustable via Dip-Switch
- > Surge: 2KV
- > Protection: Open Circuit/ShortCircuit/Overload /Class I
- > ingress protection:IP20
- > Start Time: <0.5s/220V
- > Ambient Temp: -20 ~ 45°C
- > Storage Temp: -30 ~ 85°C
- > 5 years warranty
- > Certificates: ; ENEC, SAA, CE, CB
- > Application: Track light
- > Size 3 line: 235 × 42 × 45mm    Size 4 line: 250 × 31 × 45mm

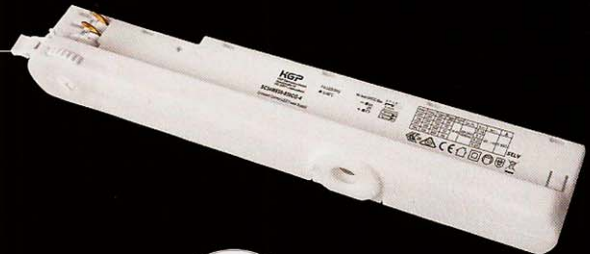

Included

| Model                                | Watt Range   | Input Voltage    | Output Voltage | Output Current | Efficiency (full load) | Power factor (full load) | Safety Certificates |
|--------------------------------------|--------------|------------------|----------------|----------------|------------------------|--------------------------|---------------------|
| SC28W500-700CG-3<br>SC28W500-700CG-4 | 15.00-20.00W | 220-240V 50/60Hz | 30-40V         | 500mA          | 87%                    | 0.9                      | ENEC, SAA, CE, CB   |
|                                      | 16.50-22.00W | 220-240V 50/60Hz | 30-40V         | 550mA          | 88%                    | 0.9                      |                     |
|                                      | 19.50-26.00W | 220-240V 50/60Hz | 30-40V         | 650mA          | 88%                    | 0.92                     |                     |
|                                      | 21.00-28.00W | 220-240V 50/60Hz | 30-40V         | 700mA          | 88%                    | 0.92                     |                     |
| SC34W650-850CG-3<br>SC34W650-850CG-4 | 19.50-26.00W | 220-240V 50/60Hz | 30-40V         | 650mA          | 88%                    | 0.92                     | ENEC, SAA, CE, CB   |
|                                      | 22.50-30.00W | 220-240V 50/60Hz | 30-40V         | 750mA          | 88%                    | 0.92                     |                     |
|                                      | 24.00-32.00W | 220-240V 50/60Hz | 30-40V         | 800mA          | 88%                    | 0.92                     |                     |
|                                      | 25.50-34.00W | 220-240V 50/60Hz | 30-40V         | 850mA          | 88%                    | 0.92                     |                     |

Note: xxx-3 suitable for 1 Phase Track  
xxx-4 suitable for 3 Phase Track

